



# TRU-A-TAK™



## TRUE INSIDE DIAMETER - TACTICAL ANTI-KINK TECHNOLOGY™

Upgrade your arsenal with Ponn's TRU-A-TAK™, the leading True Inside Diameter attack line in the industry. Utilizing our Ponn Supreme hose that was originally designed over 40 years ago, this tried and true construction uses no glued-in lining but incorporates durable polyester jackets providing incredible strength and long-lasting performance. The TRU-A-TAK™ performs extremely well at low pressures, has an extremely smooth waterway for better flows and less kinking than other true ID products on the market. Both the calendared vulcanized EPDM rubber lining and inner and outer jackets are proudly made at our factories in Pennsylvania, USA.



LOW PRESSURE



USA MADE


**TRU-A-TAK™ : TRU ID - Attack line - Tactical Anti-Kink Technology™**

### FEATURES:

- Premium quality, double jacket, EPDM (Ethylene Propylene Diene Monomer) rubber lined fire hose made from 100% high tensile strength ring-spun polyester yarn. The liner is permanently bonded to the inner jacket using a calendared vulcanized rubber backing that mechanically and chemically bonds the EPDM rubber lining to the inside jacket without the use of glues, providing the assurance that the lining will not delaminate and has a Lifetime Warranty never to delaminate.
- Performance rated at -40°F to 180°F (-40°C to 82°C).
- High-quality Dura-Cote™ protective treatment available in NFPA colors.
- Manufactured in accordance with NFPA 1961 Standard, latest edition, within our ISO-9001 (2015) certified quality management system.
- Ponn TRU-A-TAK™ is proudly Made in the United States of America and is Berry Compliant.



EPDM Rubber Liner  
 Rubber Backing  
 Polyester Inner Jacket  
 Polyester Outer Jacket

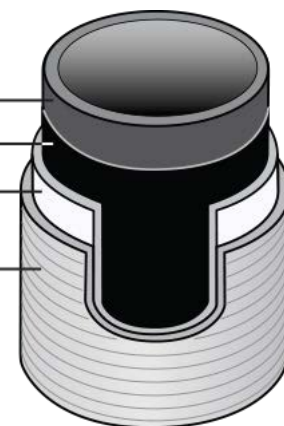

### CONSTRUCTION

Polyester Double Jacket, EPDM Rubber Inner Liner with Calendared Vulcanized Rubber Backing

### TEMPERATURE RANGE

Performs -40°F to 180°F (-40°C to 82°C)

### COLORS



PART NUMBER	HOSE SIZE	SERVICE TEST PRESSURE	PROOF TEST PRESSURE	BURST TEST PRESSURE	COUPLING BOWL SIZE	WEIGHT 50' COUPLED
	INCH	PSI	PSI	PSI	INCH	LBS
FST17X50_15N	1- 3/4"	400	800	1,200	2-1/8"	25
FST22X50_25N	2- 1/4 "	400	800	1,200	2-11/16"	31.2
FST25X50_25N	2-1/2"	400	800	1,200	2-13/16"	33

