



GLADIATOR™




JACKETED THRU-THE-WEAVE NITRILE RUBBER

Ponn's Gladiator is one of the leading attack lines in the industry. Built to last, the rugged hose is constructed with extruded thru-the-weave nitrile rubber liner with a durable outer polyester jacket providing incredible strength and long-lasting performance. The Gladiator performs well at high or low pressures, has a smooth and enhanced waterway for better flows and less kinking than other products on the market. Both the nitrile-thru-the-weave inner lining and outer jacket are proudly made at our factories in Pennsylvania, USA.

FEATURES:

- When subjected to a static pressure of 100 PSI shall be capable of safely withstanding a surface temperature of 1200° F (648° C) applied by a hot metal cube for a minimum of 45 seconds without bursting.
- The Service Test Pressure is 500 PSI, making it a very durable and reliable hose.
- Performance rated at -50°F to 180°F (-45°C to 82°C).
- Standard Dura-Cote protective treatment available in NFPA colors.
- Manufactured in accordance with NFPA 1961 Standard, latest edition, within our ISO-9001 (2015) certified quality management system.

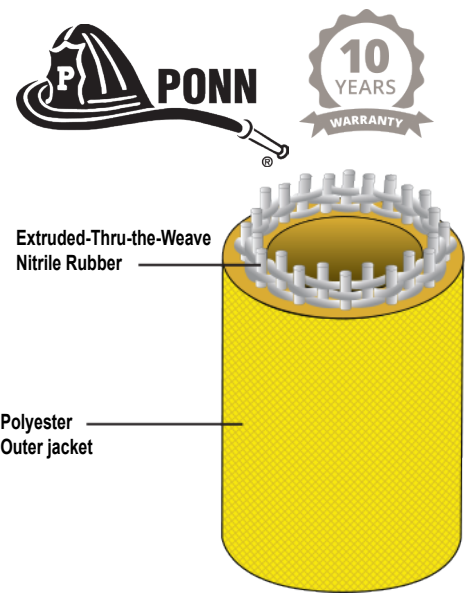

CONSTRUCTION

Nitrile Thru-the-Weave Extrusion with Polyester outer jacket

TEMPERATURE RANGE

Performs -50°F to 180°F (-45°C to 82°C)

COLORS



PART NUMBER	HOSE SIZE INCH	SERVICE TEST PRESSURE PSI	PROOF TEST PRESSURE PSI	BURST TEST PRESSURE PSI	COUPLING BOWL SIZE INCH	WEIGHT PER 50' UNCLPLD LBS
FG17X50_15N	1- 3/4"	500	1,000	1,500	2-1/4"	19
FG20X50_15N	2"	500	1,000	1,500	2-15/16"	24
FG25X50_25N	2 1/2"	500	1,000	1,500	3"	26

